



Manual washing machines **VEGA**



WWW.IBERKLEEN.COM



*Experience, Innovation, Development,
QUALITY*

IBERKLEEN 

Maintenance sector - Automotive parts
washing - Industrial mould washing
Mechanical industry - Aerospace industry - 3D
printing industry - Paint industry - Electronics
industry - Pharmaceutical industry


Solutions for every need



Glass cleaner
Automatic windscreen wiper for the windscreen, triggered automatically at the start of the wash to maintain a constant view of the wash area



Vapour output
Vapour outlet, which helps to keep the wash chamber free of vapours, preventing the visor glass from fogging up.

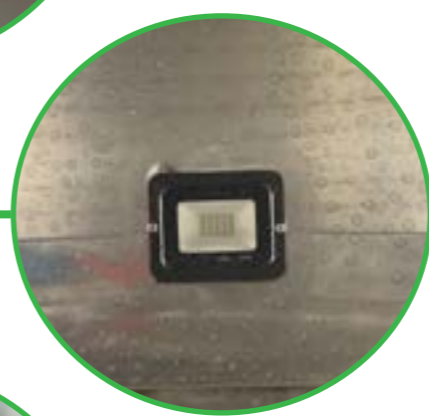

Interior led light
Indoor LED light with IP67 protection to illuminate the interior of the wash chamber



Washing and blowing gun
Washing gun with foot pedal operation and trigger on the gun. Air gun for drying and blowing parts.



Tank discharge valve
Ball valve for tank discharge.



Height adjustable feet
The machine is supported on 4 height adjustable feet to level the machine, allowing the washing height to be slightly raised or lowered.

Control panel

Simple to use mechanical control panel.
 Selector to turn on or off the washing liquid heating.
 Display for setting the washing temperature up to 60 °C.
 Push buttons for raising and lowering the door.



High pressure pump

High pressure pump controlled by foot pedal and wash gun. The pressure is adjustable from 10 to 100 bar. The pressure gauge in the centre of the machine shows the current washing pressure.




Working surface


Washing surface with two levels of separation, consisting of an upper grid with holes to facilitate the evacuation of the wash water back into the tank.

In the middle part, there is a tray with a central filter to collect the larger greases and small parts that may come out of the washed material.

In the tank there are the 2 washing resistances and an additional filter for the pump suction.

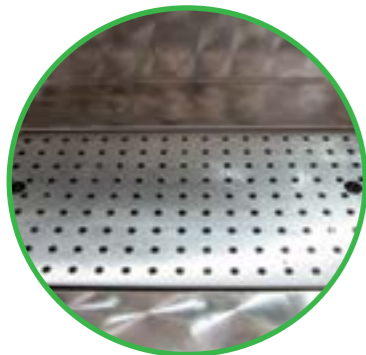

External measures

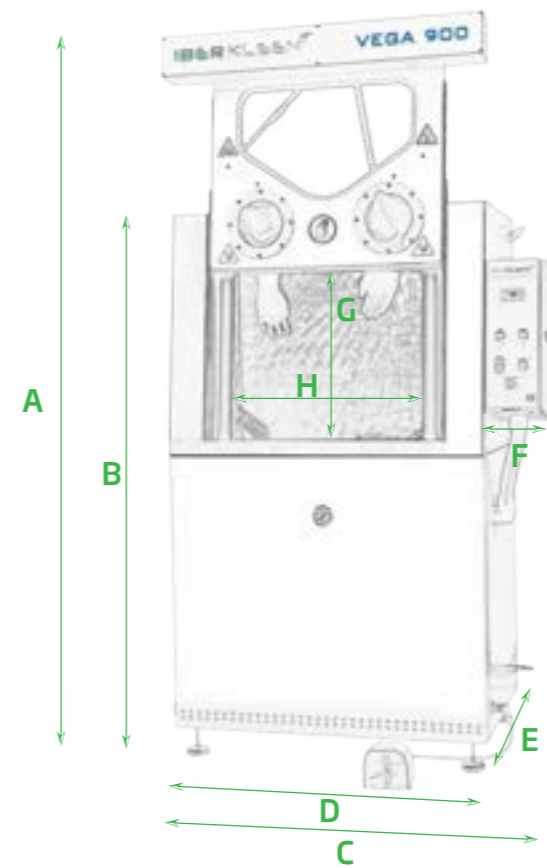

EXTERNAL MEASUREMENTS

	VEGA 900	VEGA 1100
A	2.470 mm	2.470 mm
B	1.900 mm	1.900 mm
C	1.300 mm	1.550 mm
D	1.100 mm	1.350 mm
E	750 mm	750 mm
F	200 mm	200 mm
G	550 mm	550 mm
H	650 mm	910 mm

TECHNICAL DATA


	VEGA 900	VEGA 1100
Power supply	400V - 3 PH+N+T - 50 Hz	
Carrying capacity	70 Kg	100 Kg
Tank capacity	70 litres	120 litres
Heating	4,5 Kw	6 Kw
Pressure pump flushing	10-100 bar	
Pneumatic supply	6-8 bar	
Thermostat	0-60 °C	
Internal measurements	1.090x730x800 mm	1.350x730x800 mm
Useful measures	890x720x800	1.150x720x800 mm
Material	Aisi 430 stainless steel	
Weight	345 Kg	380 Kg

Oil separator disc

Oil separator disc to remove the oil from the surface of the tank.

This operation must be carried out after the water has rested for a period of time.

Thanks to the oil separator disc, the water remains cleaner for a longer period of time, optimising the washing detergent and improving the quality of the result.

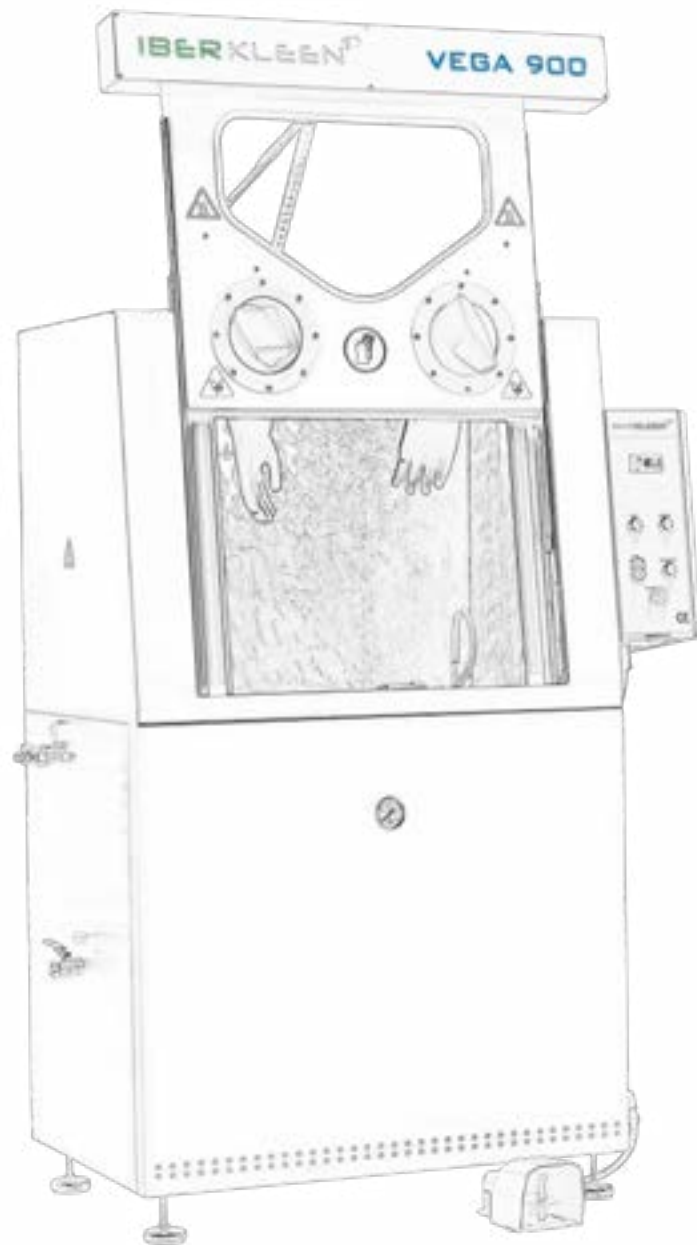

IBERKLEEN

Pol. Ind. Villayuda
C/ la Demanda S/N
Naves Azucarera, Nave C1
09007 - Burgos
ESPAÑA

Tel: +34 947 215 125

www.iberkleen.com
info@iberkleen.com

