



Lavadoras manuales

BELLATRIX

IBERKLEEN



WWW.IBERKLEEN.COM

BELLATRIX models are manual tray parts washers.

In these models, you can clean parts in the work tray using a brush with water and a tap.

These are **simple models for working quickly and efficiently** with small and medium-sized parts.

Key features and details that will help you with cleaning:

- ◆ Water temperature programmer to assist with cleaning.
- ◆ Brush.
- ◆ Water tap.
- ◆ Blow gun.
- ◆ Filter in the water tank.
- ◆ Solvent-based models have a lid to close the washing area after use.

They are available in two different sizes.



BELLATRIX WITH SOLVENT BASE



WASH TAP

Thanks to the rigidity of the hose, the tap allows us to leave it in a fixed position and rinse, wash or whatever we want by passing the item underneath.

MODE SELECTION

Thanks to the two valves, we can choose between using the tap, the brush, or both at the same time.

BRUSH

The brush allows for deeper cleaning by rubbing directly on the area to be cleaned while spraying it with the cleaning liquid.


BLOW GUN

The blow gun allows you to dry and blow away any moisture or liquid that may remain on the part after washing.


PUMP CONTROL PEDAL

The washing pump is activated by means of a foot pedal, which allows for precise control.

BELLATRIX WATER-BASED

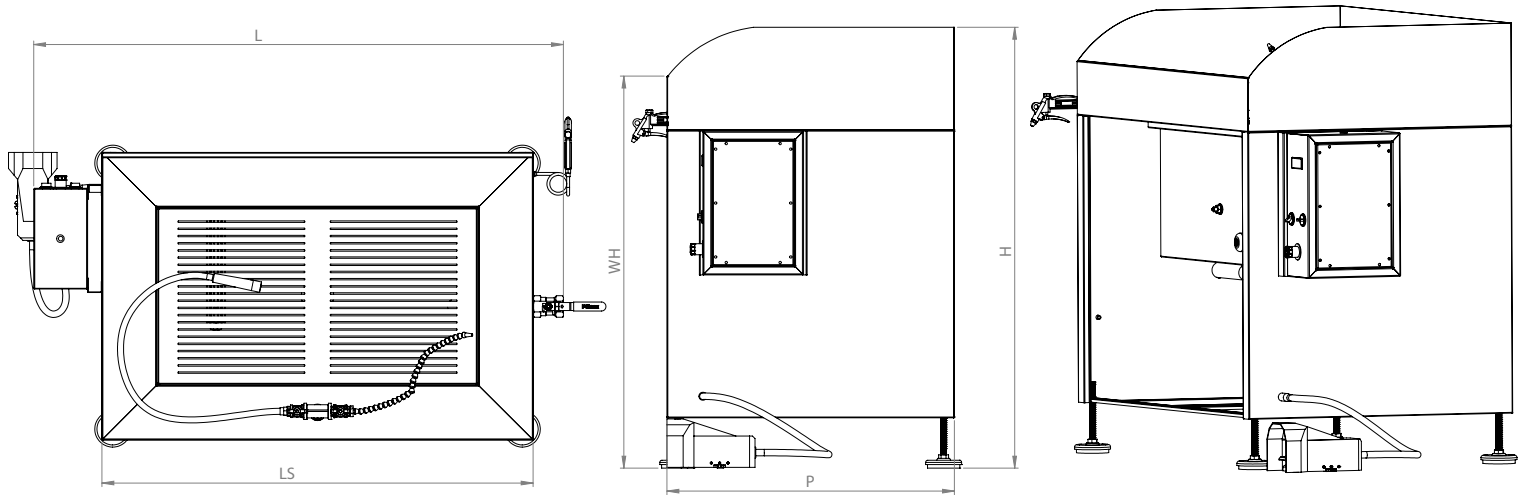

BELLATRIX WITH SOLVENT BASE

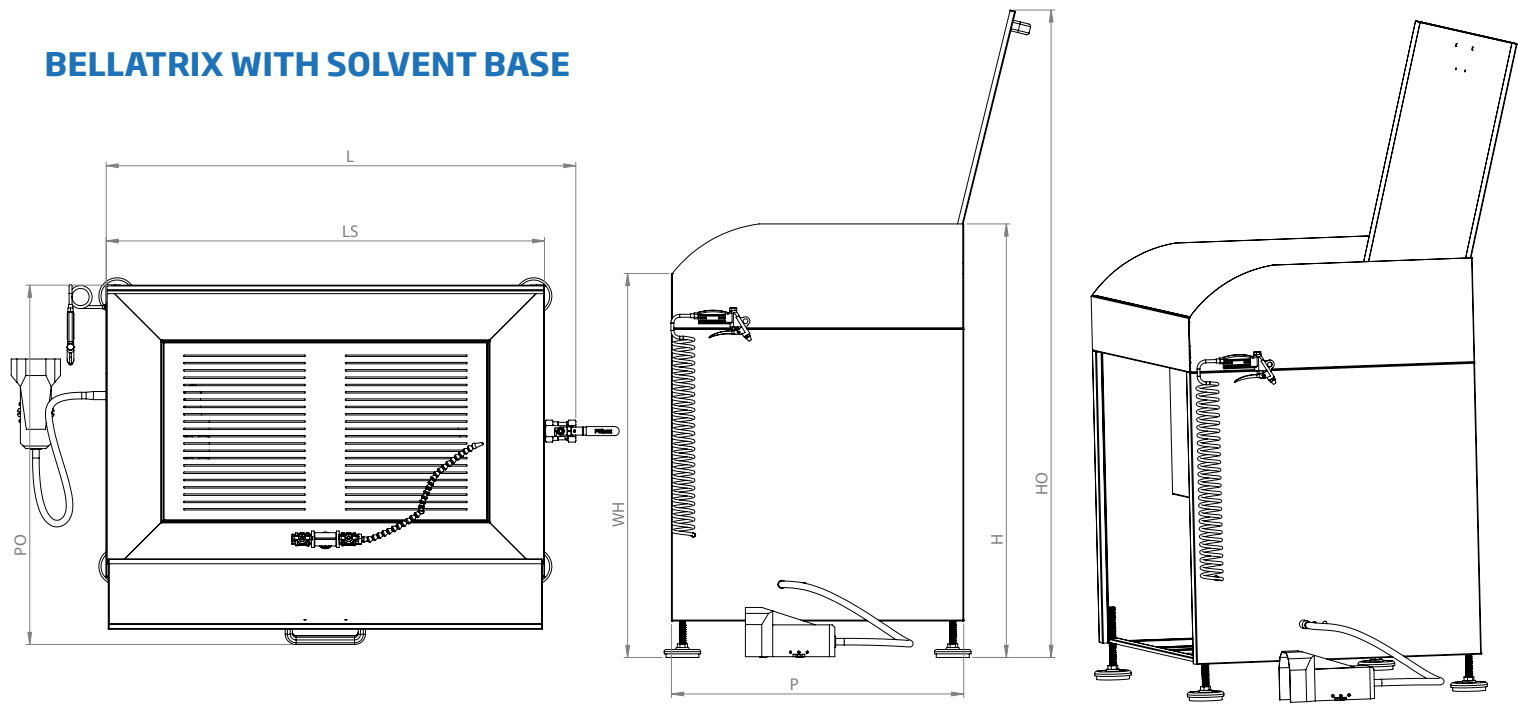

MEASURE	BELLATRIX 900	BELLATRIX 900S	BELLATRIX 1200	BELLATRIX 1200S
L	1.190 mm	990 mm	1.490 mm	1.290 mm
LS	900 mm	900 mm	1.200 mm	1.200 mm
H	1.210 mm	1.190 mm	1.210 mm	1.190 mm
HO	-	1.770 mm	-	1.770 mm
WH	1.080 mm	1.080 mm	1.080 mm	1.080 mm
P	650 mm	650 mm	800 mm	800 mm
PO	-	830 mm	-	980 mm
WS	880x630 mm	880 x 570 mm	1.180 x 780 mm	1.180 x 720 mm

TECHNICAL DATA/ MODEL	BELLATRIX 900	BELLATRIX 900S	BELLATRIX 1200	BELLATRIX 1200S
Tank capacity	60 L	60 L	130 L	130 L
Load capacity	50 kg	50 kg	70 kg	70 kg
Power supply	220V - 1PH 50 Hz			
Heating power	1 x 2.5 kW	-	1 x 2.5 kW	-
Washing pump	1x0,5HP (0,37 kW) 35 L/min	-	1x0,5HP (0,37 kW) 35 L/min	-
Thermostat	0 - 60°C	-	0 - 60°C	-
Pneumatic supply	6 - 8 bar	6 - 8 bar	6 - 8 bar	6 - 8 bar
Material	Aisi 304 stainless steel parts in contact with water			



ISO 9001
ISO 14001

BUREAU VERITAS
Certification



IBERKLEEN

Pol. Ind. Villayuda
C/ la Demanda S/N
Naves Azucarera, Nave C1
09007 - Burgos
ESPAÑA

Tel.: +34 947 215 125

www.iberkleen.com
info@iberkleen.com