



AUTOMATIC MULTI-PROCESS WASHING MACHINE

IBERKLEEN

DENEBO




WWW.IBERKLEEN.COM

*Experience, Innovation, Development,
QUALITY*

IBERKLEEN 

Maintenance sector - Automotive parts washing
- Industrial mould washing Mechanical industry
- Aerospace industry 3D printing industry - Paint
industry Electronics industry - Pharmaceutical
industry

Solutions for every need

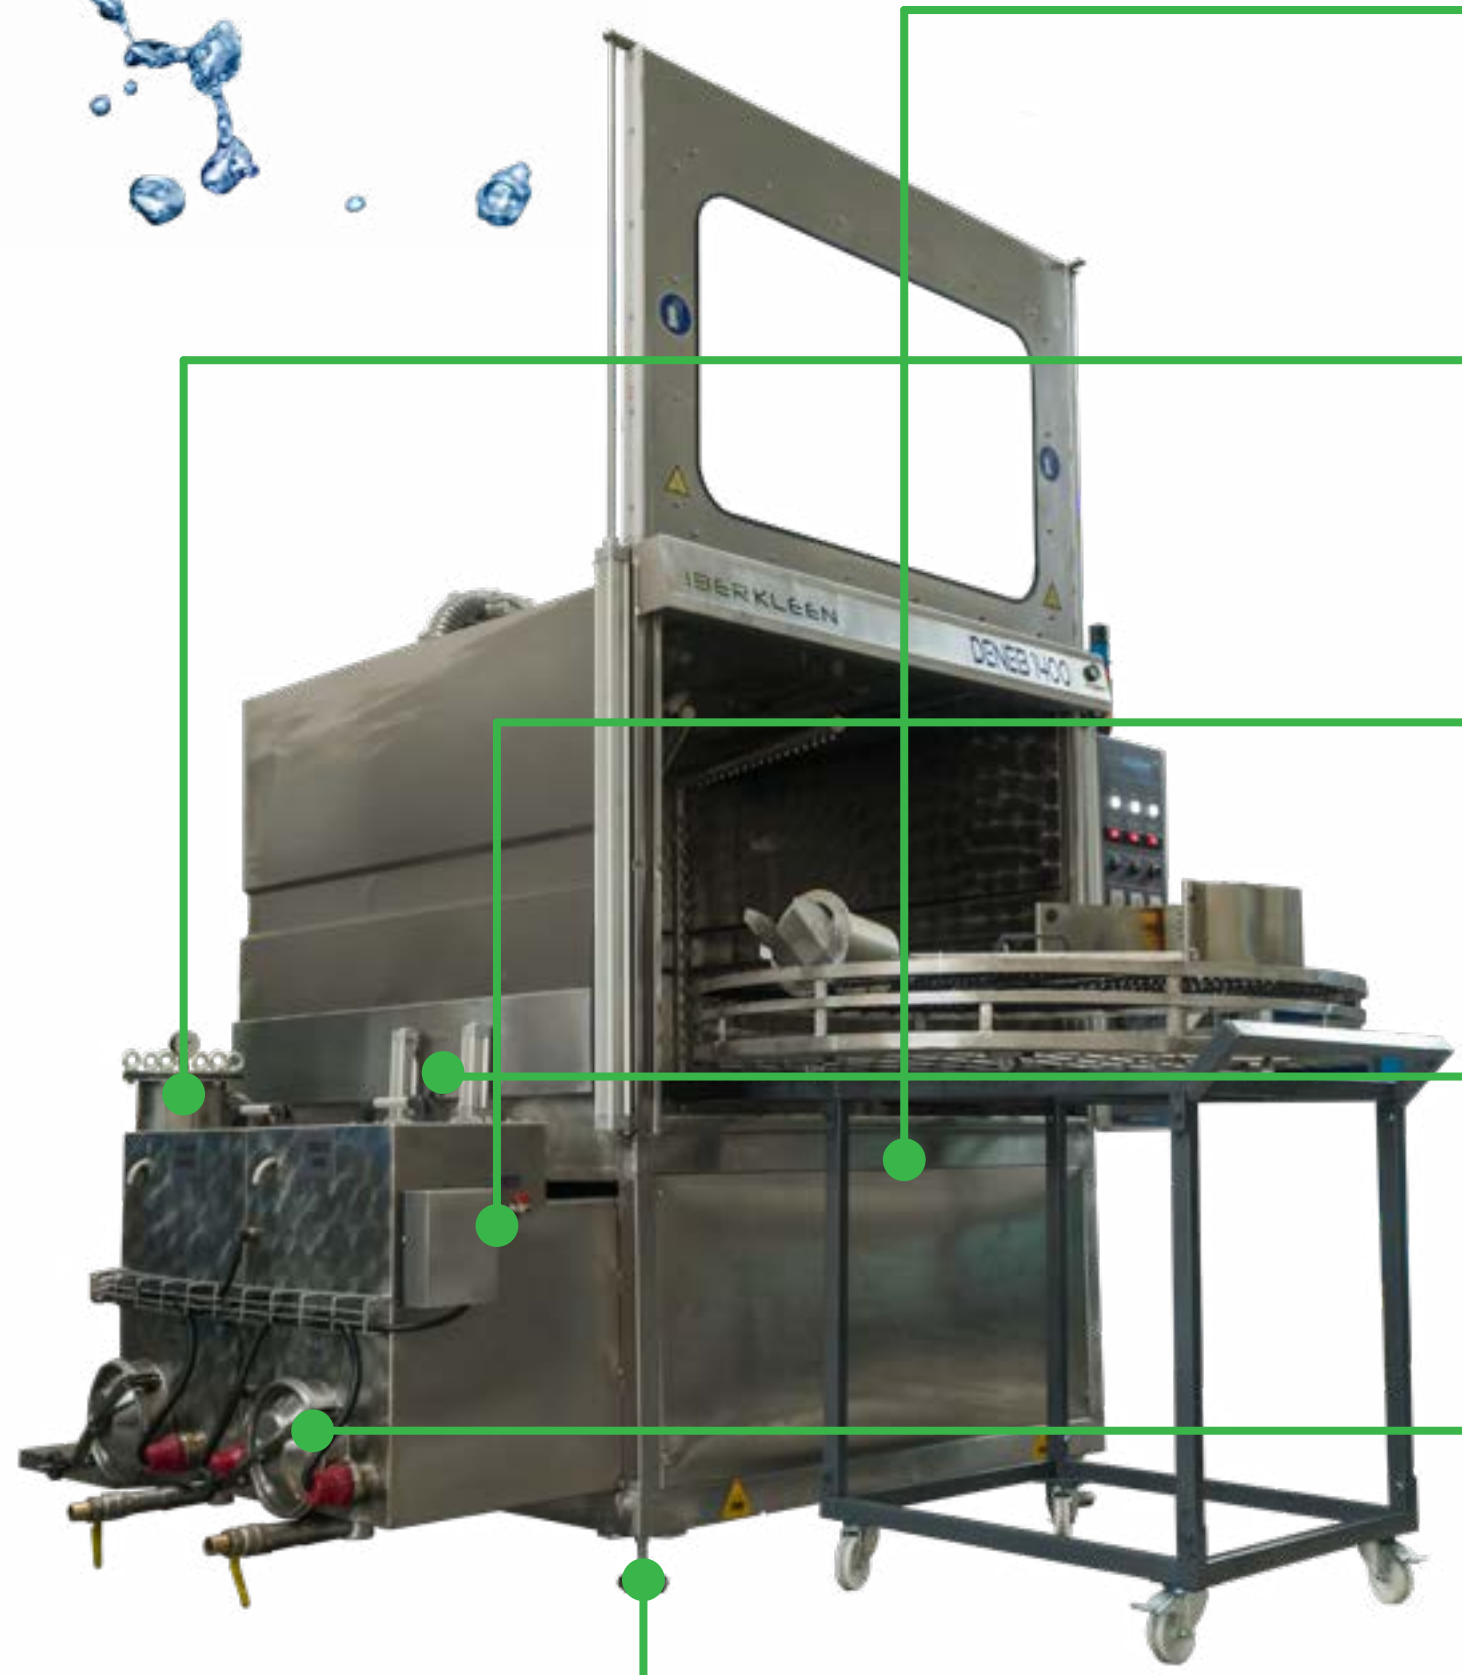

Filling solenoid valves
The washing machine is equipped with automatic filling solenoid valves for the wash tank and rinse tank.



Bag filter
Bag filter system to keep the washing liquid cleaner for a longer period of time.



Oil separator disc
Oil separator disc that removes impurities and oil from the top of the wash tank, keeping the water cleaner for longer.



Tank selection system
Thanks to 2 pneumatic pistons, the liquid returns to the correct tank according to the cycle being carried out, whether washing or rinsing.



Sludge opening and emptying
Both tanks have an opening to facilitate the cleaning of the tanks and the emptying of any sludge that may accumulate during the processes.



Height adjustable feet
The machine is supported on 4 height adjustable feet to level the machine and position it at the right height for the trolley.

Control panel

Simple to use mechanical control panel.
It has digital thermostats to set the temperature of each of the processes.
Selectors to define the desired time for each cycle.
Automatic and manual mode of operation.



Loading trolley

Parts loading trolley. Facilitates the loading and unloading of parts into the wash basket.



Included accessories

Oil separator disc with motor, to remove the oil from the top layer of the tank when the water is calm.

Reinforced steel basket with trolley to support high loads.

Insulated tank to be able to reach washing temperatures of 90°C and vapour extractor.

Oil separator disc



Reinforced basket




Insulated tank



Fume extractor




Dimensions

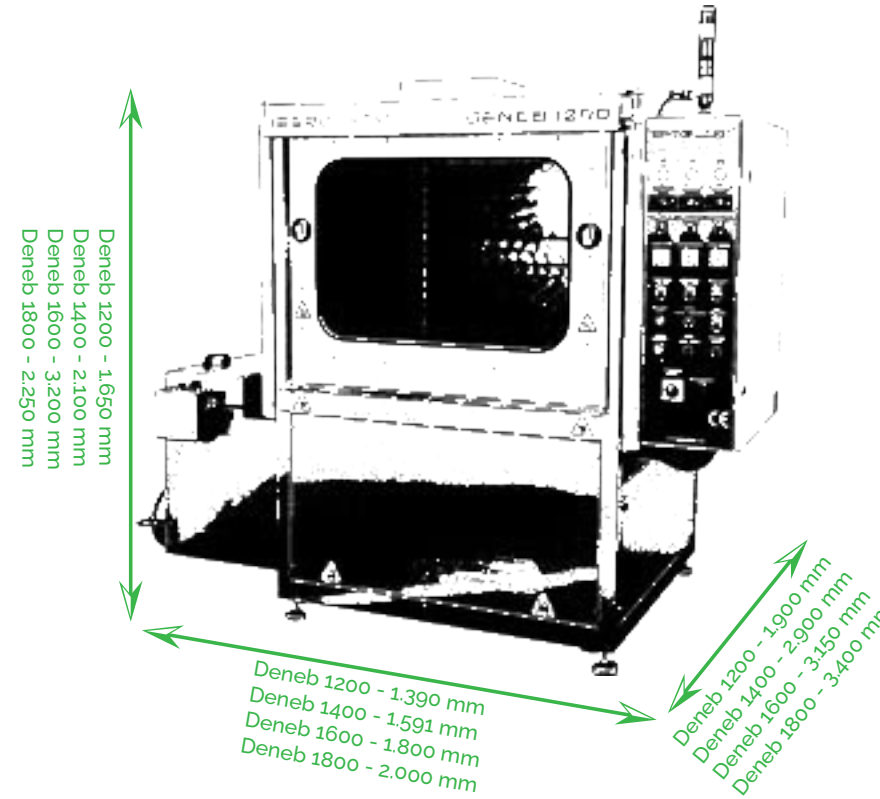

Optional

- Hot-air drying
- Filtering system
- Control panel with PLC
- Drainage pump for tanks

TECHNICAL DATA				
	Deneb 1200	Deneb 1400	Deneb 1600	Deneb 1800
Basket diameter	1.150 mm	1.350 mm	1.550 mm	1.750 mm
Washing height	550 mm	650 mm	750 mm	800 mm
Carrying capacity	450 Kg	650 Kg	750 Kg	850 Kg
Power supply	400V - 3 PH - 50 Hz			
Fume extractor	0.75 Kw			
Pump pressure	2x 6 bar	3x 6 bar	3x 6 bar	4x 6 bar
Wash tank capacity	350 litres	400 litres	450 litres	500 litres
Rinsing tank capacity	200 litres	200 litres	250 litres	300 litres
Heating	2x 7.5 Kw	3x 7.5 Kw	3x 7.5 Kw	4x 7.5 Kw
Thermostat	0-90° C			
Pneumatic supply	6-8 bar			
Material	Aisi 430			
Weight	600 Kg	750 Kg	850 Kg	950 Kg
Packaging	1600x2000x1750	1600x3000x2200	1850x3250x2300	2100x3500x2450 Peso 600

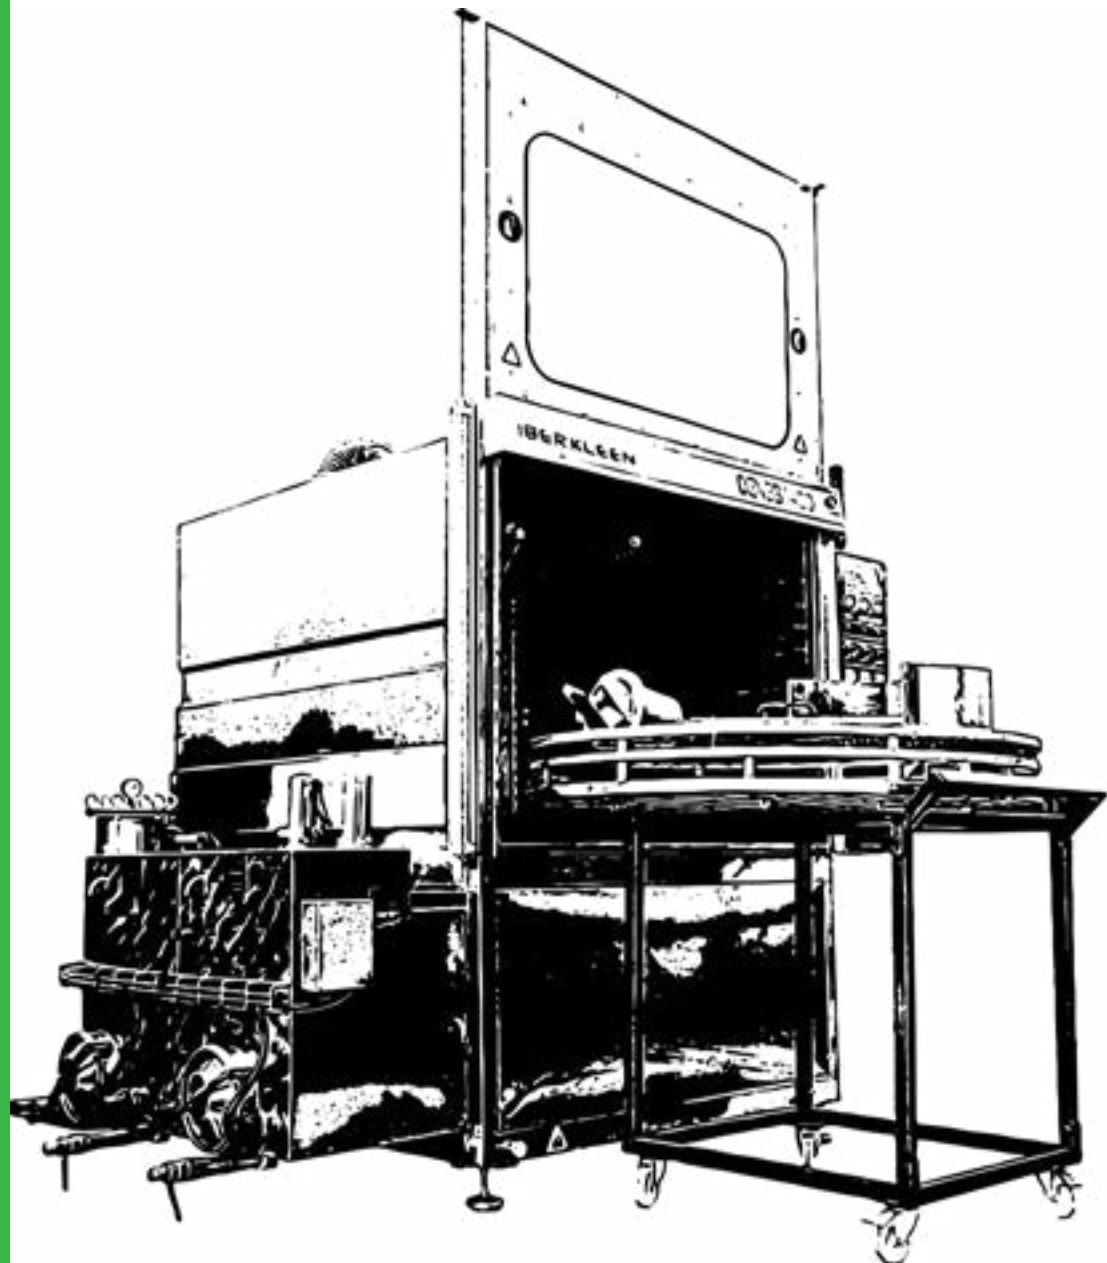

IBERKLEEN

Pol. Ind. Villayuda
C/ la Demanda S/N
Naves Azucarera, Nave C1
09007 - Burgos
ESPAÑA

Tel.: +34 947 215 125

www.iberkleen.com
info@iberkleen.com

