



Manual washing machines

VEGA

IBERKLEEN



WWW.IBERKLEEN.COM

VEGA models are manual high-pressure parts washers.

With these models, you can clean parts with adjustable pressure up to 150 bar in a closed environment.

They enable you to clean parts accurately and quickly.

The **vertical opening** of the door allows you to place it against a wall, **taking up little space.**

They come standard with a high-pressure lance, blow gun and a **TRIPLE filtration system**, with pre-filters and a disc oil-grease collector.

Furthermore, thanks to its touchscreen, it allows weekly heating programming, cleaning programme management and alerts.

The water tank has the **largest capacity on the market**, allowing for longer intervals between water changes and improving efficiency.

ADVANTAGES

- ◆ You save space by being able to place the washing machine against a wall.
- ◆ Its filtering system and tank capacity mean that the intervals between water changes are longer.
- ◆ Adjustable high pressure for quick and precise cleaning.
- ◆ Control everything easily with the touch screen: cleaning programme control, start time programming, warnings and alerts.
- ◆ Save energy thanks to its dual heating element system.

OPTIONALS:

- ◆ Precision filtering system in the tank.
- ◆ Tank emptying pump.



INTERIOR LED LIGHT

Equipped with an LED interior light that fully illuminates the inside of the machine, which, together with the windscreen wiper, gives us a clear view of the working area.

TOUCHSCREEN CONTROL PANEL

The control panel, made entirely of stainless steel, has an integrated touch screen that allows you to perform and configure all the machine's functions.

DOUBLE LEVEL SENSOR


Vega models are equipped with a double level sensor, the first to prevent operation without water, and the second for automatic filling.

OIL SEPARATOR DISC

On the right-hand side of the machine is the oil separator disc, which allows, when the water is cold and calm, the surface oil to be removed from the tank and drained into a container via the stopcock.

PUMP CONTROL PEDAL

The washing pump is activated by means of a foot pedal, which allows for precise control.

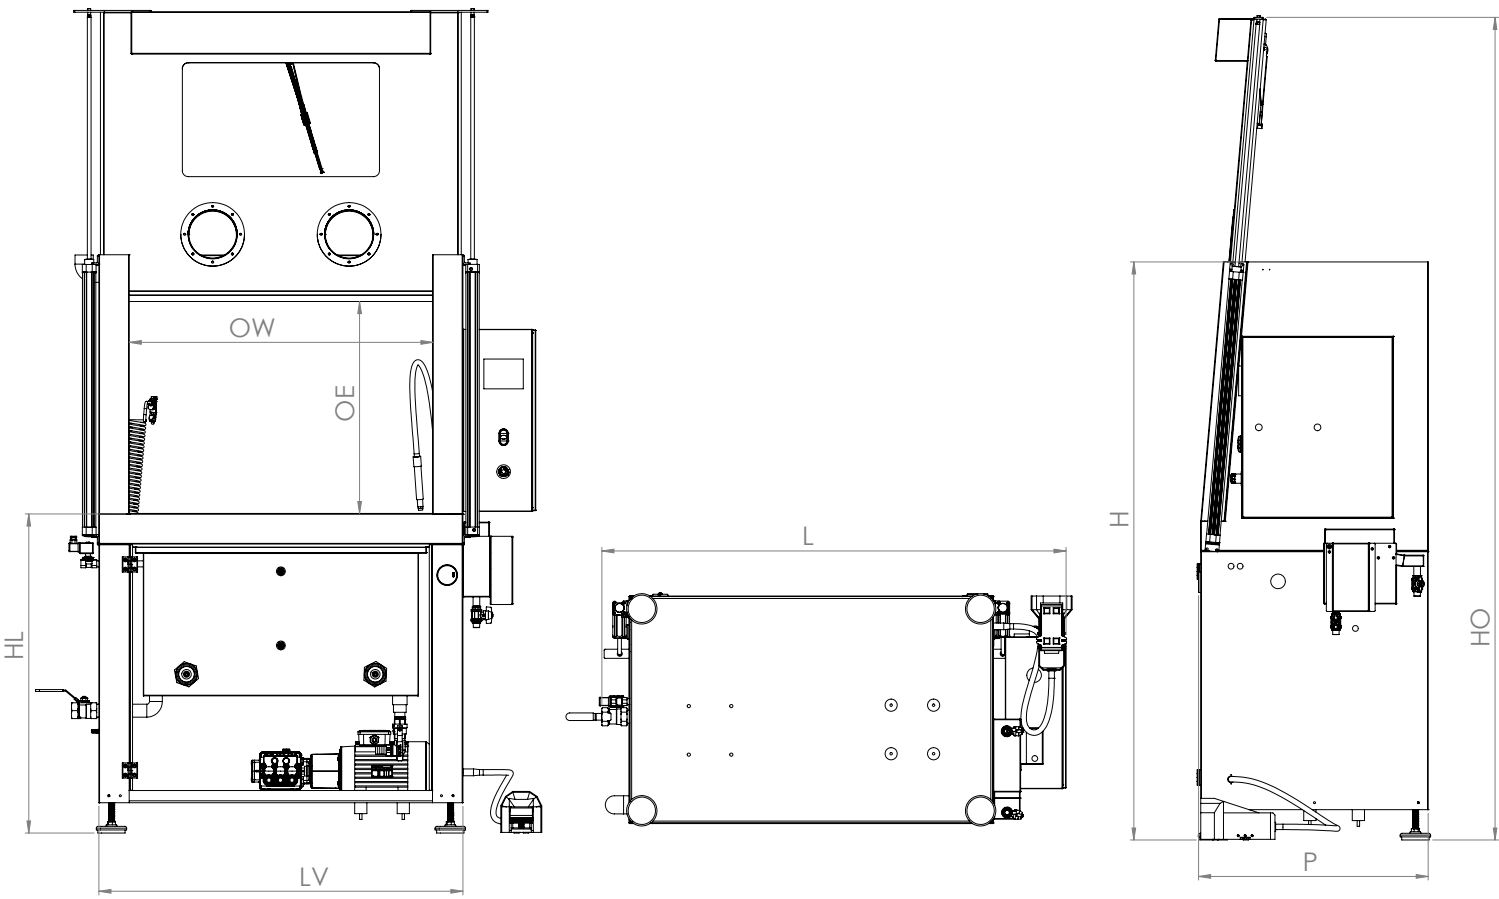

ELECTROVALVE
FOR FILLING



OIL SEPARATOR DISC



DOOR OPENING SENSOR



OPTIONALS

FINE FILTERING SYSTEM



DISCHARGE PUMP



MEASURES	VEGA 900	VEGA 1100
L	1.330 mm	1.530 mm
LV	1.000 mm	1.200 mm
P	750 mm	750 mm
H	1.910 mm	1.910 mm
HL	1.050 mm	1.050 mm
HO	2.720 mm	2.720 mm
AC	960 mm	960 mm
OE	700 mm	700 mm
OW	800 mm	1.000 mm

TECHNICAL DATA/MODEL	VEGA 900	VEGA 1100
Useful dimensions	990 x 620 x 960 mm	1.190 x 620 x 960 mm
Tank capacity	130 L	165 L
Power supply	400V - 3PH + N+ T - 50 Hz	
Heating power	2 x 3 kW	
Washing pump	1 x 3 kW - 150 bar - 11L/min	
Thermostat	0 - 60°C	
Oil separator disc	24V - 0,03 kW	
Pneumatic supply	6 - 8 bar	
Material	Aisi 304 stainless steel parts in contact with water	



IBERKLEEN

Pol. Ind. Villayuda
C/ la Demanda S/N
Naves Azucarera, Nave C1
09007 - Burgos
ESPAÑA

Tel.: +34 947 215 125

www.iberkleen.com
info@iberkleen.com

